


V5433A

3-WAY ROTARY VALVE

PN6

- Chrome-plated plug for long life span
- Optimized characteristics for supply water temperature control
- Reliable mounting for electrical actuators
- Wide range of flow rates
- Compact design

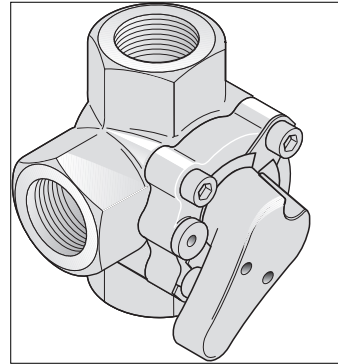

APPLICATION

The V5433A 3-way rotary valve was designed especially for accurate control of supply water temperature in heating and air conditioning systems. When used in combination with the M6063 actuator, its sturdy construction ensures a long and reliable operating life.

Technical Specification

Nominal static pressure	600 kPa (6 bar)
Maximum pressure drop	dependent on type (see "Specification and Order Number per DN" on page 3)
Leakage rate	< 1% of kVS
Ports	Internal threads
Angle of rotation	90°
Packing	Double O-ring sealing
Material body	Cast iron
Material inner parts	Chrome-plated cast iron
Medium	Heating water according to VDI 2035 (oxygen concentration < 0.2 g/m ³ , pH 8...9.5)
Water temperatures in the valve	2 to 110 °C, non-condensing
Weight	dependent on type (see "Dimensions" on page 3)
Flow characteristic	equal percentage

OPERATION

The valve controls a mixing water temperature with a rotating plug. The plug adjusts the water flow of two inputs with two control curves. The required flow water temperature is reached by adding a proportion of return water to the boiler hot water. The V5433A features special control characteristics for optimum control performance.


SUITABLE ACTUATORS

M6063L1009 (230/240 Vac; floating) M6063L4003 (230/240 Vac; floating) auxiliary switch M6063A1003 (24 Vac; floating)
M6063A4007 (24 Vac; floating) auxiliary switch

MOUNTING DETAILS


Mounting Version 1

Examples

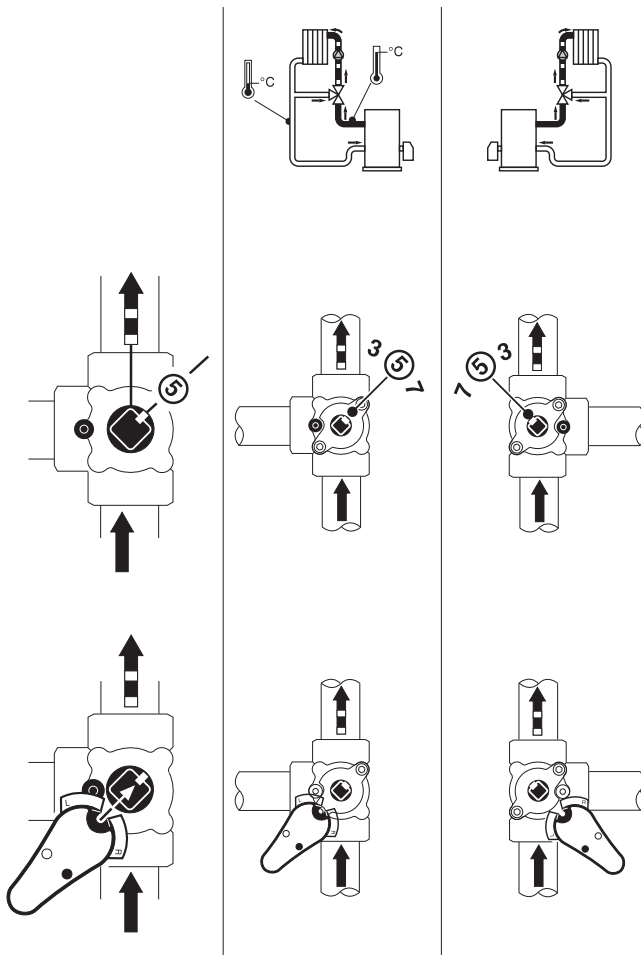

Mounting Version 2


Examples

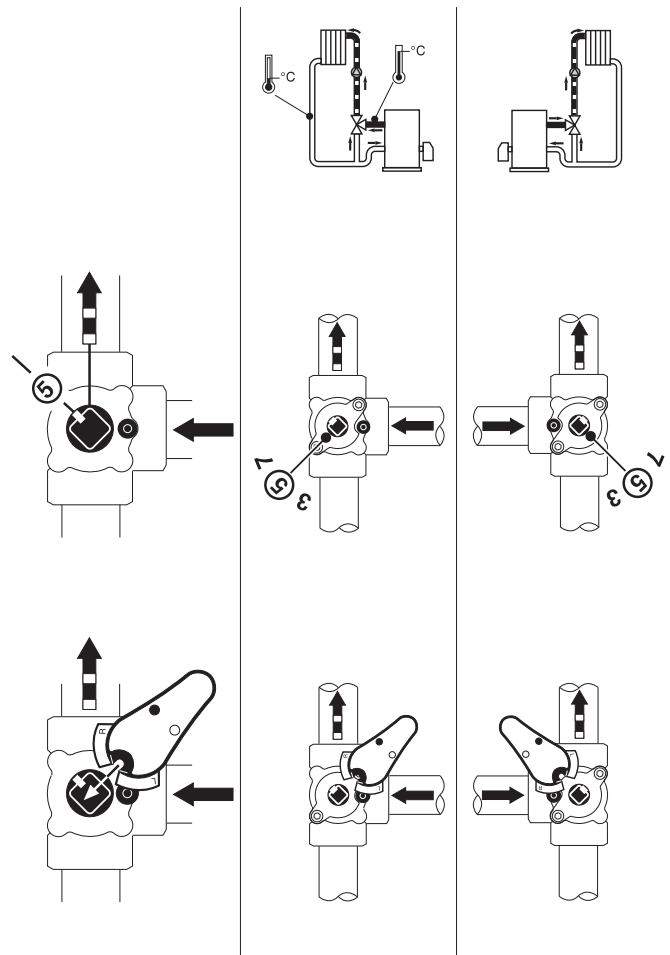

SPECIFICATION AND ORDER NUMBER PER DN

DN	OS Number Internal Thread	kvs [m³/h]	Δp [kPa]
20	V5433A1015	2.5	100
20	V5433A1023	4.0	100
20	V5433A1031	6.3	100
25	V5433A1049	10	100
32	V5433A1056	16	100
40	V5433A1064	25	100
80	V5433A1072	40	100

O-RING REPLACEMENT

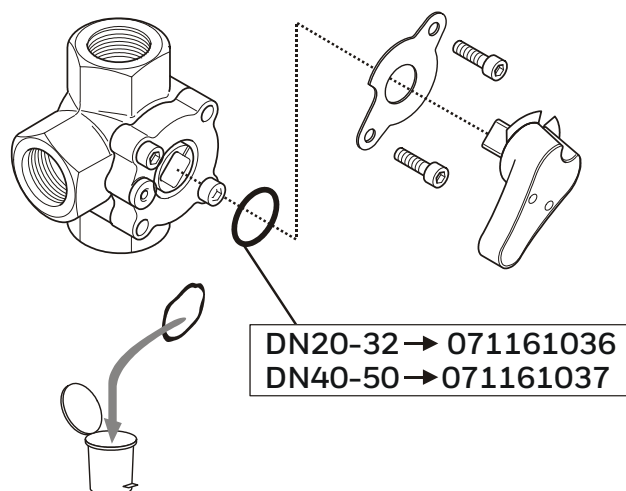

Part Descriptions

Type	DN	a [mm]	c [mm]	SW [mm]	h [mm]	i [inch]	Netweight [kg]
V5433A1015	20	85	340	41	42.5	R 3/4	0.9
V5433A1023	20	85	340	41	42.5	R 3/4	0.9
V5433A1031	20	85	340	41	42.5	R 3/4	0.9
V5433A1049	25	105	345	46	52.5	R 1	1.4
V5433A1056	32	105	350	55	52.5	R 5/4	1.9
V5433A1064	40	120	355	65	60.0	R 1 1/2	3.3
V5433A1072	50	156	365	80	78.0	R 2	6.1

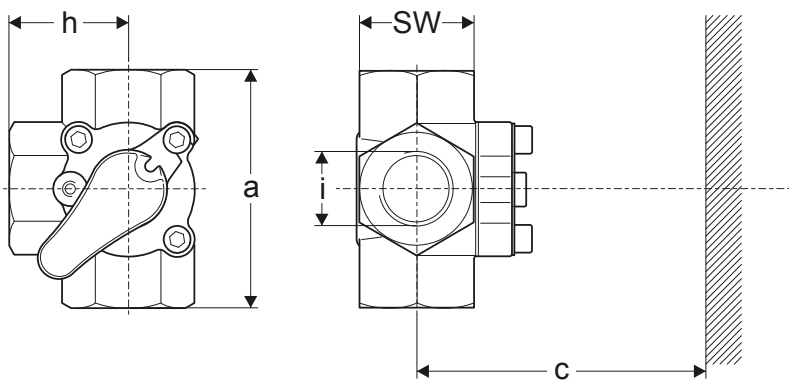


Fig. 1. V5433A dimensions

For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002

www.honeywell.com

© 2020 Honeywell International Inc.

V5433A
3-WAY ROTARY VALVE
PN6

Honeywell