


# FK-5-1-12

## FIRE SUPPRESSION SYSTEM

34, 80, 120, 140 & 180 liters Capacity Seamless Cylinder  
Use with 42 Bar (610 PSIG) FK-5-1-12 Clean Agent System

## FEATURES

PESO Approved Seamless cylinder of FK-5-1-12 Clean Agent System for 42 Bar (610 PSI) system.

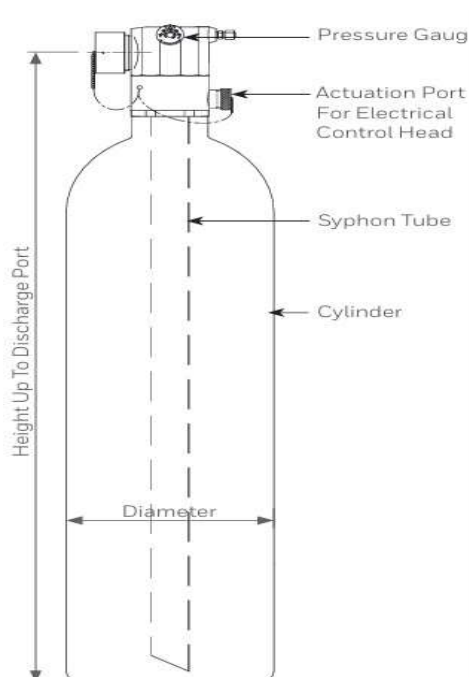

### • STORAGE TEMPERATURE

FK-5-1-12 is stored in cylinder as liquid, super pressurized with dry nitrogen to 42 bar at 21°C (610 PSIG at 70 °F)

### • MATERIALS

Valve Body: Brass

Cylinder: Seamless type, manufactured and tested in accordance with IS 7285 Standard and approved by PESO for their use

### • NOTES

1. Clean Agent Cylinder must be installed in vertical position only.
2. Do not cover remove or deface caution label.

### SEAMLESS CYLINDER DATA - METRIC

Part Number	Capacity	Valve (NB)	Agent Fill Range (Kg.)	Height (mm)	Diameter (mm)
H2-42-34-000	34 Liter	40 NB	16.4 To 38.1	1118	Ø 232
H2-42-80-000	80 Liter	40 NB	38.5 To 89.7	1823	Ø 267
H2-42-120-000	120 Liter	40 NB	57.7 To 134.6	1623	Ø 356
H2-42-140-000	140 Liter	40 NB	67.3 To 157.0	1848	Ø 356
H2-42-180-000	180 Liter	40 NB	86.4 To 201.6	1878	Ø 406

**Honeywell**

**For more information**

[www.honeywellbuildings.in](http://www.honeywellbuildings.in)

Call: 000-8000-502167

Email: [HBT-IndiaBuildings@Honeywell.com](mailto:HBT-IndiaBuildings@Honeywell.com)

**Honeywell HBT India Buildings**

Unitech Trade Center, 5th Floor, Sector-43,  
Block C, Sushant Lok Phase - I,  
Gurgaon - 122 002.



HSV-HC60WBxRxI-01-IN(0923)DS-Y  
© 2023 Honeywell International Inc.

**Honeywell**