

CN7220, CN7234 SERIES

NON-SPRING RETURN DIRECT-COUPLED DAMPER ACTUATORS
FOR MODULATING AND FLOATING / 2-POSITION CONTROL

PRODUCT DATA



SPECIFICATIONS

Supply voltage 24 Vac/dc $\pm 15\%$, 50/60 Hz;
Nominal voltage 24 Vac/dc, 50/60 Hz;

All values stated hereinafter apply to operation under nominal voltage conditions.

Power consumption

CN7220 8VA / 4 W
CN7234 10VA / 5 W

Ambient limits

Ambient operating limits -20...+60 °C (-5...+140 °F)
Ambient storage limits -40...+80 °C (-40...+175 °F)
Relative humidity 5...95%, non-condensing

Safety

Protection standard IP54 as per EN 60529
(Type 1 Enclosure)
Overvoltage category II
Pollution degree II
Action Type 1
Protection against electric shock class Class III
Electronic control software class Class A

Lifetime

Full stroke cycle 60000
Repositions 1.5 million

Mounting

Round damper shaft 10...27 mm (3/8...1-1/16")
Square damper shaft 10...18 mm (3/8...11/16");
45° steps

Shaft length min. 22 mm (7/8")

Control signal

0(2)...10 Vdc
4...20 mA
Input impedance >100 k Ω [0...10 V]
500 Ω [4...20 mA]

Feedback signal

Limits 1 mA at 0...10 V

Torque rating

CN7220 20 Nm (177 lb-in)
CN7234 34 Nm (300 lb-in)

Runtime

95 sec (60 Hz) / 110 sec (50 Hz
or DC supply)

Rotation stroke

Max. 95°
see "Dimensions" on page 8

Dimensions

Weight (without cables) 1.35 kg (3 lbs.)

Noise rating

40 dB(A) max. at 1 m

Certification

CE&UL

GENERAL

These direct-coupled damper actuators provide modulating control for:

- air dampers,
- VAV units,
- air handling units,
- ventilation flaps,
- louvers,
- reliable control for air damper applications with up to 4.6 m² / 50 sq.ft. (20 Nm / 177 lb-in) or 7.8 m² / 85 sq. ft. (34 Nm / 300 lb-in) (seal-less dampers; air friction-dependent).

FEATURES

- Self-centering shaft adapter
- Access cover to facilitate connectivity
- Service/off for safe & easy servicing
- Rotation direction selectable by switch
- Declutch for manual adjustment
- Mechanical end limits
- Field-installable auxiliary switches
- Mountable in any orientation (no IP54 if upside down)
- Mechanical position indicator
- CE and UL certified

MODELS

| Model # | Description |
|--------------|---|
| CN7220A2007 | 20Nm,24Vac/Vdc, Modulating and floating/2-position control, Non-Spring return, Voltage Feedback Signal and without aux. Switch. |
| CN7220A2007S | 20Nm,24Vac/Vdc, Modulating and floating/2-position control, Non-Spring return, Voltage Feedback Signal and without aux. Switch. With Self-centralize Adaptor. |
| CN7234A2008 | 34Nm,24Vac/Vdc, Modulating and floating/2-position control, Non-Spring return, Voltage Feedback Signal and without aux. Switch. |
| CN7234A2008S | 34Nm,24Vac/Vdc, Modulating and floating/2-position control, Non-Spring return, Voltage Feedback Signal and without aux. Switch. With Self-centralize Adaptor. |

PRODUCT IDENTIFICATION SYSTEM

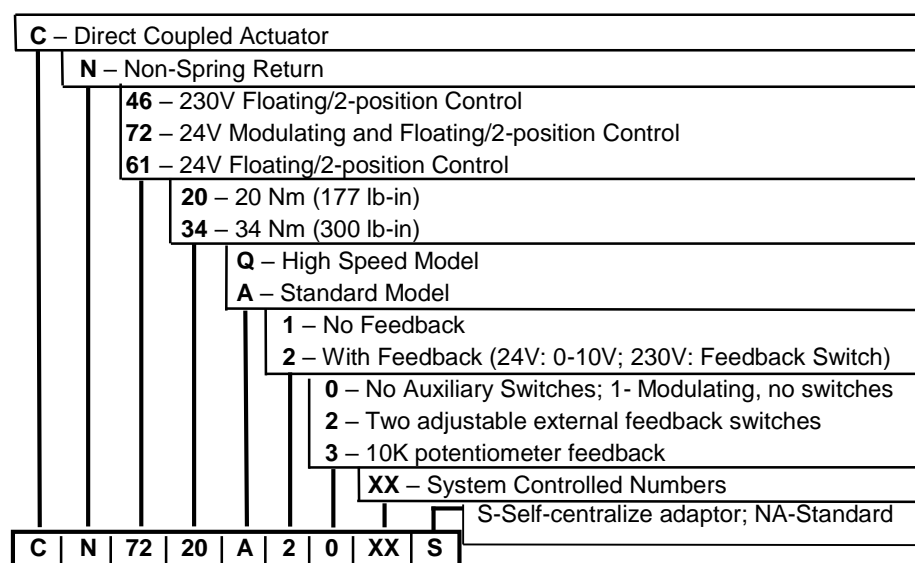


Fig. 1. Product Identification System

OPERATION / FUNCTIONS

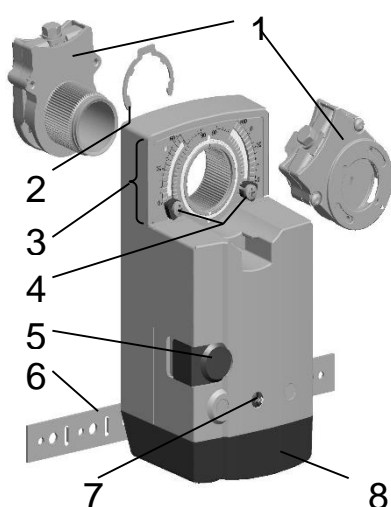


Fig. 2. Setting units and control elements

Legend for Fig.2:

- 1 Self-centering shaft adapter
- 2 Retainer clip
- 3 Rotational angle scales (0...90° / 90...0°)
- 4 Mechanical end limits
- 5 Declutch button
- 6 Anti-rotation bracket
- 7 Function Selection Switch
- 8 Access cover

Contents of Package

The delivery package includes the actuator itself, parts 1 through 8 (see Fig.2), the anti-rotation bracket screws, and installation instruction.

RUN MODES

The function selection switch (see Fig 3) is used to place the actuator into any one of five different modes:

- 2-10V, modulating control; floating/2-position control, cw run

- 0-10V/Dir, modulating control; floating/2-position control, cw run
- Service/Off, actuator stop running
- 10-0V/Rev, modulating control; floating/2-position control, ccw run
- 10-2V, modulating control; floating/2-position control, ccw run



Fig. 3. Function selection switch

Power-Off Behavior

If power is removed, the actuator retains its position.

Service/Off

If the function selection switch is set to the "Service/Off" position, all rotary movement is cancelled, and all control signals are ignored, thus allowing the actuator to be safely manually operated.

Floating/2-Position Run Mode

If the function selection switch has been set to one of the four positions (2-10V, 0-10V/Dir, 10-0V/Rev, 10-2V) – and the actuator is wired as Floating/2-position mode (see A2 and A3)

, then as soon as operating power is applied, the actuator will run clockwise or counterclockwise.

Modulating Run Mode

If the function selection switch has been set to one of the four positions (2-10V, 0-10V/Dir, 10-0V/Rev, 10-2V) – and the actuator is wired as modulating mode (see A1) – as soon as operating power is applied, the actuator will run according to the control signals applied. If terminal 5 is also wired, the actuator will output the voltage feedback signal(0/2-10V) proportional to actuator's actual position. Alternatively, if terminal 4 is wired and powered on, actuator will override the control signal and immediately come to a position of 0% of max. stroke.

Table 1 describes the actuator behavior (stops, rotates CCW, or rotates CW) for the floating mode in relation to the control signals applied to terminals 3 and 4 and to the function selection switch setting.

Table 2 describes the actuator behavior (stops, rotates CCW, or rotates CW) for the 2-position mode in relation to the control signals applied to terminals 3 and 4 and to the function selection switch setting.

Table 3 describes the actuator behavior (stops, rotates CCW, rotates CW, runs in proportional position, or runs to 0% of max. stroke) for the modulating mode in relation to the control signals applied to terminals 3 and 4 and to the function selection switch setting.

Table 1. Shaft adapter behavior in the floating mode

| Control signal at | | Function selection switch settings | | | | |
|-------------------|------------|------------------------------------|--------------|---------------|--------------|----------|
| Terminal 3 | Terminal 4 | 2...10V | 0...10V /Dir | Service / Off | 10...0V /Rev | 10...2 V |
| open | Open | stops | stops | stops | stops | stops |
| open | 24 Vac/dc | CCW | CCW | stops | CW | CW |
| 24 Vac/dc | Open | CW | CW | stops | CCW | CCW |

Table 2. Shaft adapter behavior in the 2-position mode

| Control signal at | | Function selection switch settings | | | | |
|-------------------|------------|------------------------------------|--------------|---------------|--------------|----------|
| Terminal 3 | Terminal 4 | 2...10V | 0...10V /Dir | Service / Off | 10...0V /Rev | 10...2 V |
| 24 Vac/dc | Open | CW | CW | stops | CCW | CCW |
| 24 Vac/dc | 24 Vac/dc | CCW | CCW | stops | CW | CW |

Table 3. Shaft adapter behavior in the modulating mode

| Control signal at | | Function selection switch settings | | | | |
|--|------------|------------------------------------|----------------|---------------|----------------|-----------------|
| Terminal 3 | Terminal 4 | 2...10V | 0...10V /Dir | Service / Off | 0...10V /Rev | 10...2 V |
| Open | Open | -- | -- | stop | -- | -- |
| | 24 Vac/dc | 0% (most left) | 0% (most left) | stop | 0%(most right) | 0% (most right) |
| < min. control signal plus 0.24V | Open | -- | -- | stop | -- | -- |
| | 24 Vac/dc | 0% (most left) | 0% (most left) | stop | 0%(most right) | 0% (most right) |
| between min. control signal plus 0.24V and max. control signal minus 0.24V | Open | proportional | proportional | stop | proportional | proportional |
| | 24 Vac/dc | 0% (most left) | 0% (most left) | stop | 0%(most right) | 0% (most right) |
| > max. control signal minus 0.24V | Open | -- | -- | stop | -- | -- |
| | 24 Vac/dc | 0% (most left) | 0% (most left) | stop | 0%(most right) | 0% (most right) |

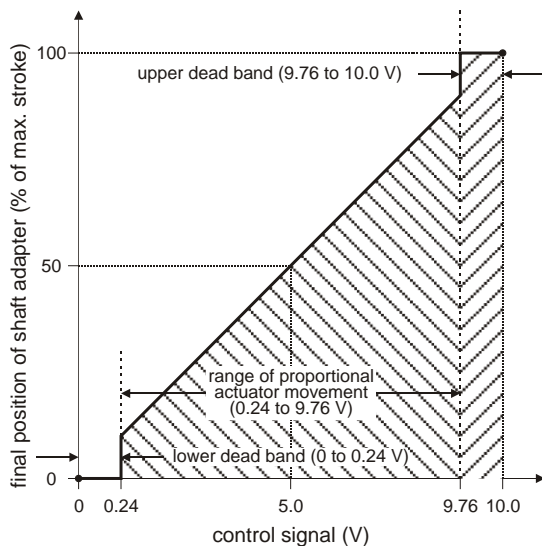


Fig. 4. Final actuator position in dependence upon control signal (example selection setting of 0...10 V)

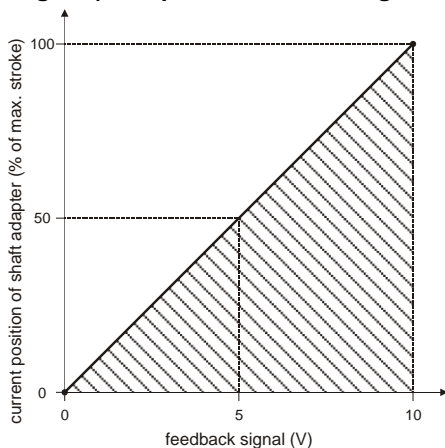


Fig. 5. Feedback signal in dependence upon current position of actuator (example selection switch setting of 0...10 V)

Adaption

Adaption is a function in which the actuator re-maps its feedback signal and control signal in accordance with repositioned mechanical end limits (see Fig. 6) and thus recognizes their new positions.

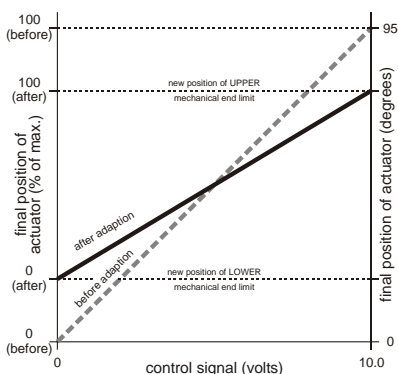


Fig. 6. Adaption (selection switch set to "0...10 V")

Adaption will be carried out only when:

- Modulating models only, such as CN7220A, CN7234A.
- Actuator is wired in modulating mode (see Fig. A1)
- The control signal's value rises up into the upper dead band (i.e. to more than the max. control signal minus 0.14V) or drops down into the lower dead band (i.e. to less than the min. control signal plus 0.14V), and if the shaft adapter can remain at the respective (upper or lower) mechanical end limit at least 3 seconds, the actuator will recognize the new position automatically, and auto-adaption is happened (see Fig. 4).

Sleep Mode

When actuator reaches end stop or any obstacles blocking its running, it will fall into sleep mode automatically. Actuator will periodically start up and try to resume running, which will save energy significantly through whole service life.

Overriding

An override is a condition in which a 24 V signal is applied to terminal 4 of an actuator in the modulating mode, thus causing the actuator to ignore the control signal at terminal 3, whereupon it will instead move to a position of 0% of its maximum stroke. It would be the most left side [0/2~10V mode] or most right side [10~0/2 V mode] (see Table 3).

Feedback

If correspondingly wired (see A1), the actuator provides, via terminal 5, a feedback signal (0/2~10V) proportional to the actual position of the actuator (see Fig. 5).

Dip Switches

The actuator is equipped with two dip switches (only switch 1 selectable) accessible after removing the access cover (see Fig. 7).

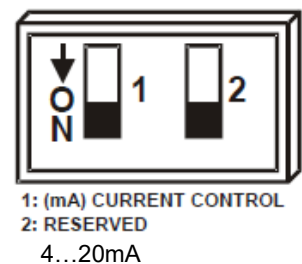
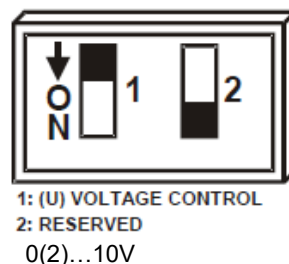



Fig. 7. Dip switches (view with PCB at bottom)

Voltage/Current Control Signal Selection Dip Switch

In its default shipping position, the voltage/current control signal dip switch (see Fig. 7) is set to **OFF** (= voltage control), as shown in Fig. 7. Setting it to ON results in current control 0(4)...20mA.

Position Indication

The hub adapter indicates the rotation angle position by means of the rotational angle scales (0...90° / 90...0°).




Fig. 8. Position indication

Manual Adjustment

! IMPORTANT

In order to prevent equipment damage, you must remove power set the rotation direction switch to the "Service/Off" before manual adjustment.

After removing power or setting the rotation direction switch to the "Service/Off" position, the gear train can be disengaged using the declutch button, permitting the actuator shaft to be manually rotated to any position. The feedback signal will then follow the new position.

Limitation of Rotation Stroke

Two mechanical end limits (adjustable in 5° increments) are provided to limit the angle of rotation as desired (see Fig. 9).




Fig. 9. Mechanical end limits

The mechanical end limits must be securely fastened in place. It is important that they properly mesh with the rotational angle scales when the screws are tightened.

INSTALLATION

These actuators are designed for single-point mounting.

! IMPORTANT

In order to prevent equipment damage, you must remove power or set the rotation direction switch to the "Service/Off" position before manual operation.

Mounting Instructions

All information and steps are included in the installation instructions supplied with the actuator.

Mounting Position

The actuators can be mounted in any desired orientation (no IP54 if mounted upside down; see Fig. 10). Choose an orientation permitting easy access to the actuator's cables and controls.

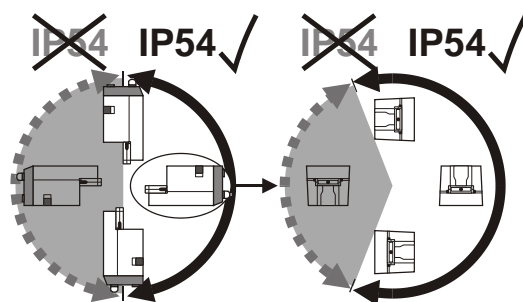


Fig. 10. Mounting for IP54

Mounting Bracket and Screws

If the actuator is to be mounted directly on a damper shaft, using the mounting bracket and screws included in the delivery package.

Self-Centering Shaft Adapter

The self-centering shaft adapter can be used for shafts having various diameters (10...27 mm [3/8...1-1/16"]) and shapes (square or round).

In the case of short shafts, the shaft adapter may be reversed and mounted on the duct side.

Stroke Limitation with Mechanical End Limits

The mechanical end limits enable the stroke to be limited from 0...90° in increments of 5°.

Wiring

Connecting to the Power Supply

In order to comply with protection class II, the power source of 24 V actuators must be reliably separated from the network power supply circuits as per DIN VDE 0106, part 101.

SAFETY ISOLATING TRANSFORMER (IS REQUIRED)

Access cover

To facilitate wiring the actuator to the controller, the access cover can be detached from the actuator.

IMPORTANT

Remove power before detaching the access cover. Once the access cover has been removed, please take care to avoid damaging any of the parts now accessible.

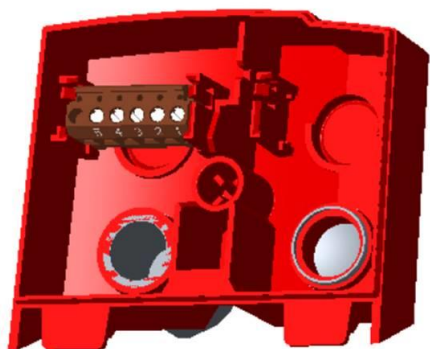


Fig. 11. Access cover

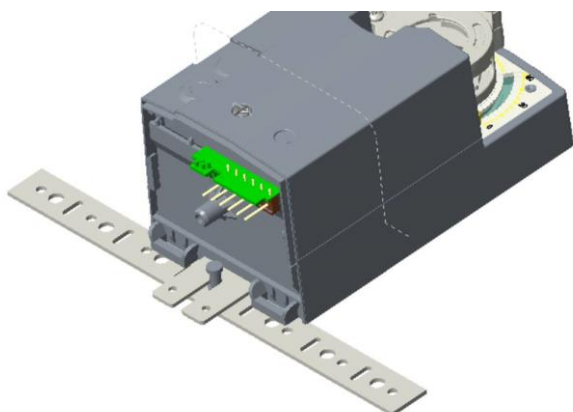



Fig. 12. Actuator with access cover removed

OPTIONAL ACCESSORIES

The following optional accessories can be ordered separately.


Auxiliary Switch Kit

Order no.: SW2-CN



The auxiliary switches are field-installable parts providing two SPDT freely-adjustable switches.

Wiring Diagrams

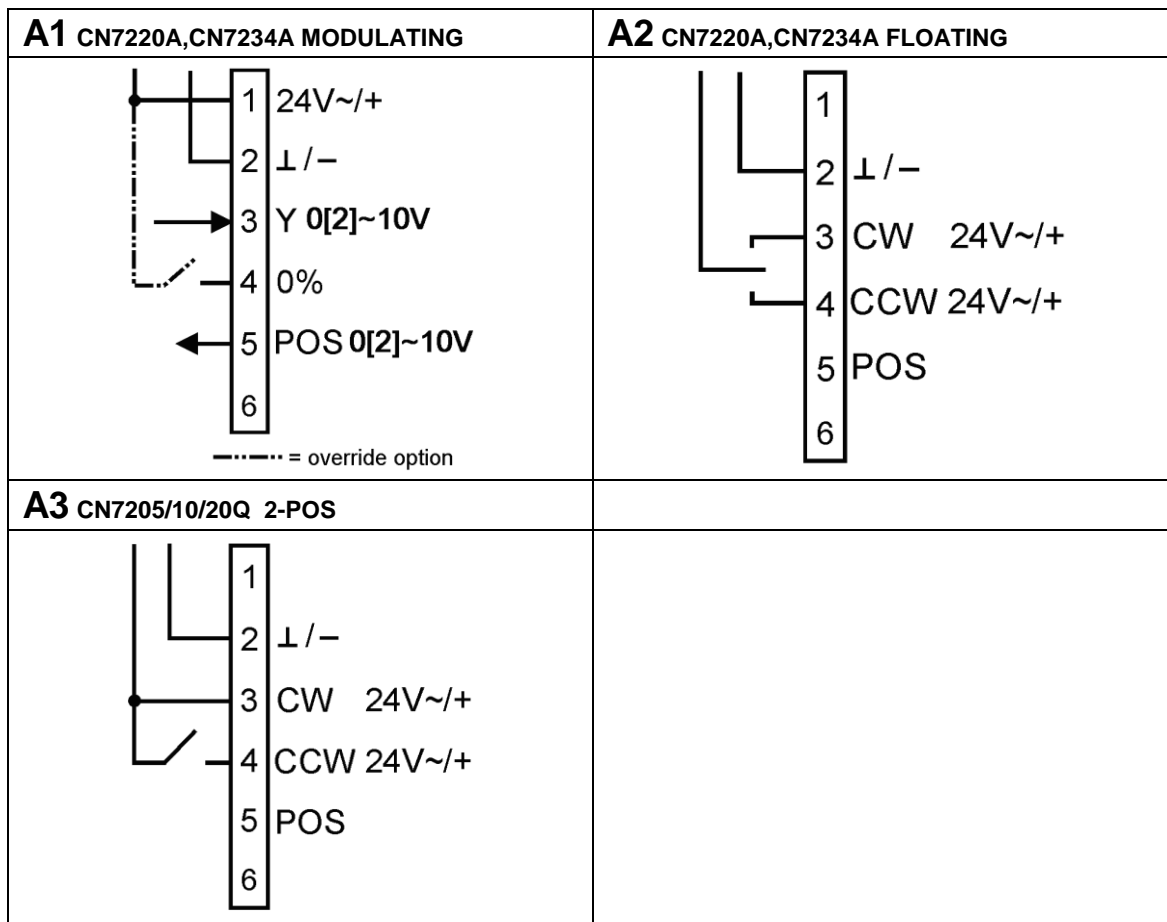


Below 2 tables summarize the information presented in the preceding wiring diagrams.

| Terminal | Function selection switch | | |
|---|---------------------------|---------------------------|---------------------------|
| | Modulating | Floating | 2-position |
| 1 | 24 V ~/+ (power) | unused | unused |
| 2 | common ⊥/- | common ⊥/- | common ⊥/- |
| 3 | 0[2]...10 V (control) | 24 V ~/+ (control signal) | 24 V ~/+ (control signal) |
| 4 | 24 V ~/+ (override) | 24 V ~/+ (control signal) | 24 V ~/+ (control signal) |
| 5 | 0[2]...10 V (feedback) | unused | unused |
| NOTE: All cables connected to these terminals must be equipped with spark suppression. | | | |

Wiring requirement: 20~16AWG, Cu, Str/Sol with Torque 4.5lb-in.

DIMENSIONS

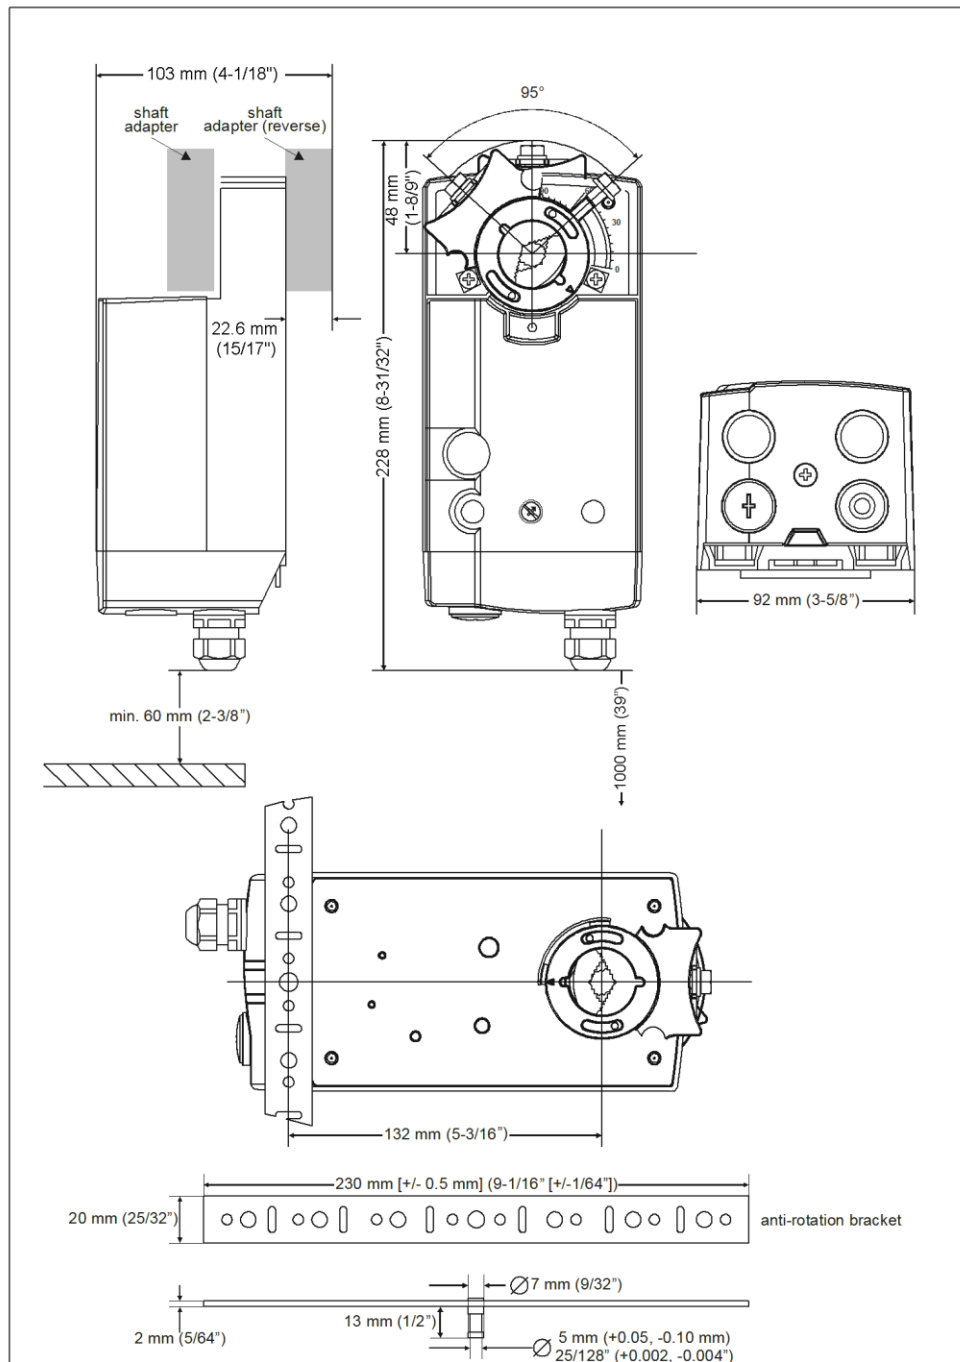

Honeywell

Automation and Control Solutions
 Honeywell ECC. (Tianjin) Co., Ltd.
 158 NanHai Road, TEDA
 Tianjin, 300457, P.R.C.

All information subject to change without prior notification!

HBT-GCB-FDA-RA01-OCT-2018-V01-EN