


YS-SLS4 SERIES Y-STRAINER (SCREWED)

- Cast iron body with Powder coated
- Stainless steel filter screen

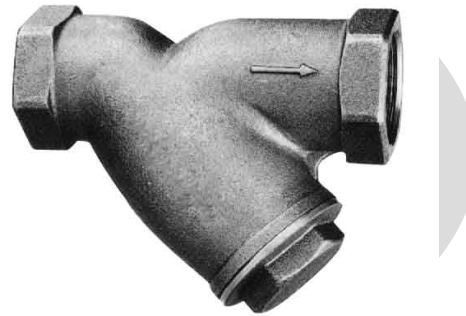


SYSTEM OVERVIEW

Honeywell Y-type strainer Screwed is widely used in water application and is used for protecting valve and other equipments from scrap and impurities in the system.

Technical Specification

Nominal pressure	PN16
Size Range	DN15-DN80
Medium	Chilled and hot water
Medium Temp.	-10°C to 120°C
End Connection	Screwed Type

DIMENSIONS (mm)

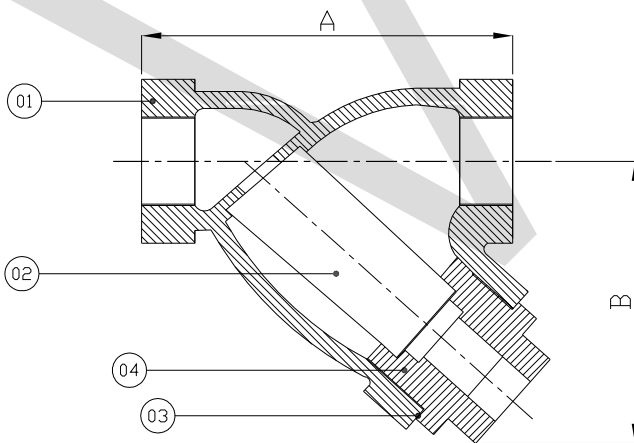

Part Descriptions

PT No.	PART NAME	MATERIAL
01	Body	Cast Iron
02	Cover	Cast Iron
03	Gasket	EPDM
04	Filter Screen	SS-304

Outside Dimension (mm)

DN Size	Face to face (A)	Height (B)	Mesh Hole size	No. of holes per Sq. inch
15	75	61	φ1/ 16"	67
20	92	71	φ1/ 16"	67
25	108	80	φ1/ 16"	67
32	133	108	φ1/ 16"	67
40	156	152	φ1/ 16"	67
50	190	155	φ1/ 16"	67
65	246	166	φ1/ 16"	67
80	275	202	φ1/8"	27

For more information!
<https://honeywellbuildings.in>
Call: 1-800-103-0339
Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings
Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002

www.honeywell.com

© 2020 Honeywell International Inc.

YS-SLS4 SERIES
Y-STRAINER (SCREWED)

Honeywell