

HEI SERIES

HEICC-2301T

HEICC-2321T

2MP 30x Zoom Explosion-Proof IP Camera

Honeywell's latest explosion-protected and flameproof network camera is a good fit for onshore, offshore, marine, and heavy industrial installations in hazardous and challenging environments. The camera features a 316L stainless steel housing certified for hazardous areas according to IECEx. The housing prevents any interior sparks or explosions from escaping and igniting the gases or dust in the surrounding air. The HEICC-2301T and HEICC-2321T camera provide extremely crisp video with up to 2 million effective pixels, 30x optical zoom, and True Day/Night WDR for continuous surveillance in both hazardous and safe area applications. This product complies with the Essential Health and Safety Requirements relating to the design and construction of products intended for use in potentially explosive atmospheres.

Explosion-Proof Certification

- IECEx certified with AISI 316L stainless steel construction
- Certified for use in Gas Zone 1 & 2 (Class IIA, IIB, IIC) and Dust Zone 21 & 22 (Class IIIA, IIIB, IIIC)
- Certified temperature for explosion-proof applications: -40°C to 60°C (-40°F to 140°F)
- M25×1.5 threaded hole for use of cable glands or conduit
- IP68 rating guarantees complete protection against harsh weather
- This product is Flameproof, Optical Radiation and Dust Ignition protection by enclosure.

Flexible Surveillance Solution

- 2MP 60fps, 30x optical zoom and P-Iris lens providing maximum flexibility to clearly view the target
- H.265, H.264 and MJPEG codec, triple stream support
- Support for unicast and multicast mode for streaming
- ONVIF Profile S, G, T and M compliant
- Supports analytics including Loitering, Intrusion, Line crossing, Tampering, Smart Motion Detection, Object Detection and others
- Contain no content or material from any companies or their subsidiaries prohibited under US National Defense Authorization Act (NDAA) Section 889 and can be used as part of video systems which comply with NDAA Section 889

FEATURES AND BENEFITS

- | | | | | |
|---|---|---|---|---|
| <ul style="list-style-type: none">• 2MP high resolution camera to capture more details• 1/2.8" progressive scan image sensor• Excellent low light performance with min. illumination of 0.005 lux Color | <ul style="list-style-type: none">• 4.5 – 135 mm, F1.6–F4.3, P-Iris, 30x optical zoom lens• Up to triple stream support• Support for Electronic image stabilizer (EIS)• True WDR: 130 dB | <ul style="list-style-type: none">• Multiple, selectable compression formats (H.265 HEVC/H.264/MJPEG)• Loitering, Intrusion, Tampering, SMD, Motion Detection• Tempered glass with sun shroud | <ul style="list-style-type: none">• Global language support with web GUI in 14 languages• NDAA compliant• 100~240V AC power input• Cyber Security features include signed certificates and data encryption | <ul style="list-style-type: none">• Optional stream encryption – camera to Maxpro under AES256 providing secure data integrity and privacy• ONVIF Profile S, G, T and M compliant• Water resistant IP66, IP67, IP68 ingress protection rating |
|---|---|---|---|---|



*Images/Certifications/logo for illustration purpose only.

Easy to Install and Use

- 100~240V AC power input
- Built-in heater
- Integrated wiper and washer control system operated from web client or preset
- 10 meters cable with options unarmoured RJ45 interface and armoured RJ45 and FC Fiber Optic interface.
- Remote configuration, motorized zoom adjustments and auto focus through web client

MARKET OPPORTUNITIES

The camera features stainless steel housing and offers 2MP high resolution image quality. They are ideally suited for video surveillance monitoring of onshore, offshore, marine, and heavy industrial environments, such as the oil and gas industries, as well as dusty environments, such as the paper and textile industries.

IEC/ANSI/ISA-62443-4-1 Cyber Security certification for Honeywell

Honeywell

HEI Series Explosion-Proof IP Camera

Technical Specifications

OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive
IMAGE SENSOR	1/2.8" CMOS
SENSOR SIZE (H x V)	5.184 x 3.888 mm
NUMBER OF PIXELS (H x V)	1920 x 1080
MINIMUM ILLUMINATION	0.005 lux (Color), 0.0005 lux (B/W) @F1.6
S/N RATIO	50db
ELECTRONIC SHUTTER SPEED	1/1 to 1/30,000 sec
DAY/NIGHT	Auto (ICR) / Color / BW
BACKLIGHT COMPENSATION	WDR / BLC / HLC
WHITE BALANCE	Auto/Fixed Current/Manual
GAIN CONTROL	0~100%
WIDE DYNAMIC RANGE	130dB
NOISE REDUCTION	3D DNR
LENS	4.5 – 135mm, P-Iris, F1.6-F4.3
OPTICAL ZOOM	30X
DIGITAL ZOOM	16X
ELECTRONIC IMAGE STABILIZATION	Support
ANGLE OF VIEW	H: 62.35° – 2.53°; V: 37.87° – 1.79°
PRIVACY MASKING	Off / On (up to 5 Areas)
DEFOG	Support
LOCAL STORAGE ¹	Support for MicroSD up to 256GB
ALARM INPUTS / OUTPUTS	2 Alarm In 2 Alarm Out (include 1 dedicated alarm out for washer control)
PRESET	2 for Wiper and Washer control
RESET FUNCTION	Hard-wire reset terminal
VIDEO	
VIDEO COMPRESSION	H.265 HEVC/H.264/MJPEG, Smart Codec
RESOLUTION	1st:1920x1080/1280x720@50/60fps 2nd:1920*1080/704*576(PAL)/704*480(NTSC)/640*480/352*288(PAL)/352*240(NTSC) @25/30fps 3rd:640*480/352*288(PAL)/352*240(NTSC)/320*240 @25/30fps

NUMBER OF VIDEO STREAMS	3
FRAME RATE MAIN STREAM	Max 60fps
FRAME RATE SECOND STREAM	Max 30fps
FRAME RATE THIRD STREAM	Max 30fps
BIT RATE	100K~12Mbps (15K~2Mbps for encryption)
AUDIO	
AUDIO COMPRESSION	G.711a/G.711Mu
AUDIO STREAM	2-Way, Full duplex
AUDIO INTERFACE	Line In/Out
NETWORK	
ETHERNET	10 Base-T/100 Base-TX Ethernet (RJ-45) Optional FC Optical Fiber
SUPPORTED WEB BROWSERS	Chrome/Edge
SUPPORTED OS	Microsoft Windows 10
PROTOCOLS ²	IPv4, IPv6, TCP / IP, HTTP, HTTPS, RTSP / RTP / RTCP, IGMP / Multicast, SMTP, DHCP, NTP, DNS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, TLS
INTEROPERABILITY	
MAXIMUM USERS ACCESS	10 Users
SECURITY	User account and password protection, HTTPS, IP Filter, Digest authentication, TLS1.2 only, Stream encryption, AES128 / 256, SSH / Telnet closed
LANGUAGES SUPPORTED	Arabic, Czech, Dutch, English, French, German, Italian, Japanese, Korean, Polish, Portuguese (Brazil), Russian, Spanish, Turkish
EVENTS / ANALYTICS	
VIDEO ANALYTICS	People Counter, Multi Loitering, Intrusion, Scene Change, Tampering, Smart Motion Detection (SMD), Motion Detection, Face Detection, Line crossing Detection, Unattended Object Detection, Missing Object Detection
EVENT TYPE	Video MD, Alarm input, Recording notification, Tampering
EVENT LINKAGE	Event notification using digital output, Email and MicroSD card
ELECTRICAL	
POWER SUPPLY	100~240V AC, 50/60 Hz
POWER CONSUMPTION	Max 0.5 A

HEI Series Explosion-Proof IP Camera

Technical Specifications

MECHANICAL	
DIMENSIONS (WDXH)	177 x 522 x 217 mm
PRODUCT WEIGHT	14 kg
PACKAGE WEIGHT	16 kg
HOUSING	316L Stainless Steel
ENVIRONMENTAL	
OPERATING TEMPERATURE	-40°C < Ta < +60°C
RELATIVE HUMIDITY	Upto 95%, non-condensing
INGRESS PROTECTION	IP66, IP67, 1P68
HEATER	Built-in
WIPER	Supported
WASHER CONTROL	Supported
REGULATORY	
HAZARDOUS CERTIFICATIONS	IECEX Ex db IIC T6 Gb IECEX Ex tb IIIC T80°C Db CCoE
STANDARDS	IEC 60079-0:2017/COR1:2020 IEC 60079-0:2017/ISH1:2019 EC 60079-0:2017/ISH2:2019 IEC 60079-1:2014/ISH1:2020 IEC 60079-1:2014/COR1:2018 IEC 60079-31:2013 IEC 60079-28:2015/ISH1:2019
ENVIRONMENTAL CERTIFICATIONS	IEC 60068-2-1 (Cold test) IEC 60068-2-2 (Dry Heat Test) IEC 60068-2-30 (Damp Heat Test) QM333:2010 (Corrosion Salt Test) IEC 60068-2-14 (Change in Temperature Test) QM333 (Vibration Test) EC 61373:2010 (Shock Test)
EMC	EN55032:2015+A11:2020 EN 55035:2017+A11:2020 EN 50130-4:2011 EN 50130-4:2011+A1:2014 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A2:2021/AC:2022-01 FCC Part 15 Subpart B
SAFETY	EN IEC 62368-1: 2020/A11: 2020
IMPACT RESISTANCE	IK10 (excluding the front glass and wiper assembly)
COUNTRY OF ORIGIN	India

¹ Micro SD Card is optional and pre-fitted card from factory only. Hence need to be ordered along with camera.

² Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

SYSTEM INTEGRATION*	
PRO-WATCH NVR	Up to 256 IP channels RAID 5/6 NVR
PRO-WATCH NVR SOFTWARE	Up to 256 IP channels Recording Software
MAXPRO NVR CE	Multi channel RAID 5/6 solution
MAXPRO NVR PE	Up to 128 IP channels RAID 5/6 NVR
MAXPRO NVR SE	Up to 64 IP channels System NVR
MAXPRO NVR XE	Up to 16 IP channels System NVR
MAXPRO NVR SOFTWARE	Up to 128 IP channels Recording Software
HONEYWELL DVM	Support with Honeywell DVM R710.1 (and later maintenance releases)

*Refer to the NVR integration matrix for more information.


OPTIONAL MOUNTS AND ACCESSORIES	
HEI-SD	256GB MicroSD Card for Exproof IPC
HEICC-WM	316L Stainless Steel Wall Mount Bracket for Exproof Fixed Zoom camera
HEICC-PM	316L Stainless Steel Pole Mount Adaptor for Exproof Fixed Zoom camera, for use with HEICC-WM
HEICC-CM	316L Stainless Steel Pole Mount Adaptor for Exproof Fixed Zoom camera, for use with HEICC-WM
HEICC-NB	316L Stainless Steel Nozzle bracket assembly for Exproof Fixed Zoom camera



HEICC-WM + Adaptor

HEI Series Explosion-Proof IP Camera

DIMENSIONS

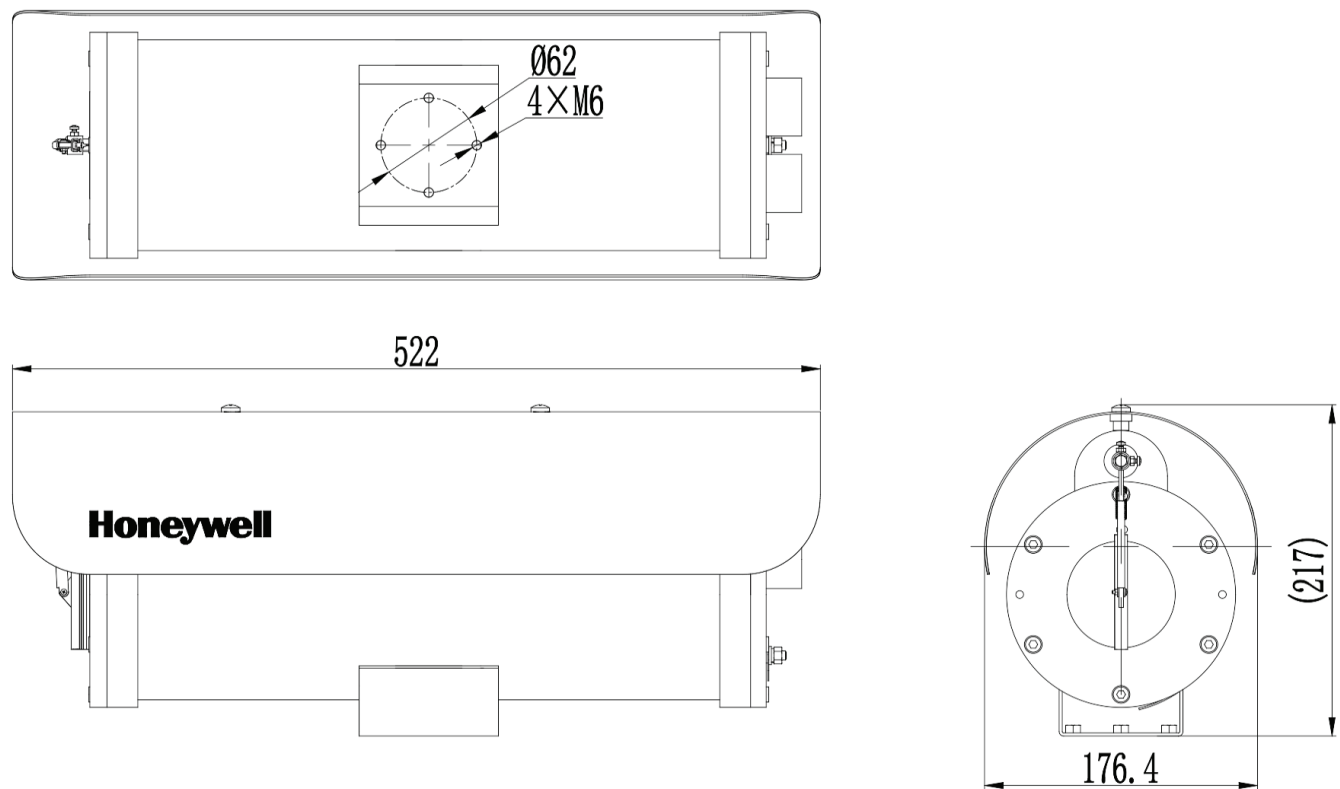

All dimensions in MM.

ORDERING

PART CODE NO	DESCRIPTION
HEICC-2301T	WDR 2MP Exproof Fixed Zoom, 30x Zoom, Wiper, RJ45 Interface, Unarmoured cable 10 Mtrs, 100~240 VAC
HEICC-2321T	WDR 2MP Exproof Fixed Zoom, 30x Zoom, Wiper, RJ45 and FC Fiber Optical Interface, Armoured cable 10 Mtrs, 100~240 VAC

For more information,

<https://honeywellbuildings.in>

Tel: +91 124 4975000

Email:

BuildingAutomation.SecurityIndia@honeywell.com

Honeywell Building Automation

Unitech Trade Center, 5th Floor, Sector-43,

Block C, Sushant Lok Phase - I,

Gurgaon - 122 002, Haryana, India

<https://www.honeywellbuildings.in/>



HEVC Advance™

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. IECEx logo is a trademark of IEC. HEVC Advance logo is a trademark of HEVC Advance.

Honeywell reserves the right, without notification, to make changes in product design or specifications.

HBT-SEC-HEICC-IN(0525)DS

© 2025 Honeywell International Inc.

**HEI Series Explosion-Proof IP
Fixed Zoom Camera**

Honeywell